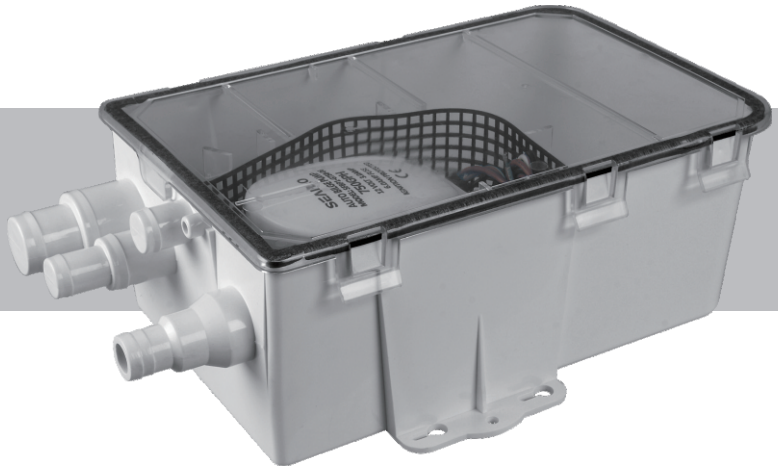

Shower Sump Pump System

Features & Benefits

Removable mesh filter allows easy cleaning
Clear screw-down cover
Check valve on outlet
Ignition protected
Handles waste water from more than one tapping points
Easy installation
Multiple inlet ports for versatile usuage
Available in 600 & 750 GPH (2271 & 2838 LPH)
models in 12 and 24 volt versions

Typical Applications

Marine
RV & Campers
Industrial

PUMP

Liquid Temperature
110°F (43°C) Max.
Priming Capabilities
Not needed flooded suction

Power
3.0 amps max current draw
Max Pressure
Not needed
Inlet/Outlet Ports
Inlet: 1 x 3/4"
1 x 3/4" or 1 x 1"
1 x 1 1/8" or 1 x 1 ½"
Outlet: 3/4"
Weight
2.57 lbs (1.17 kg)

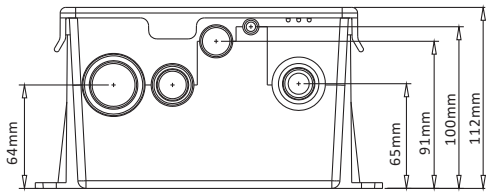

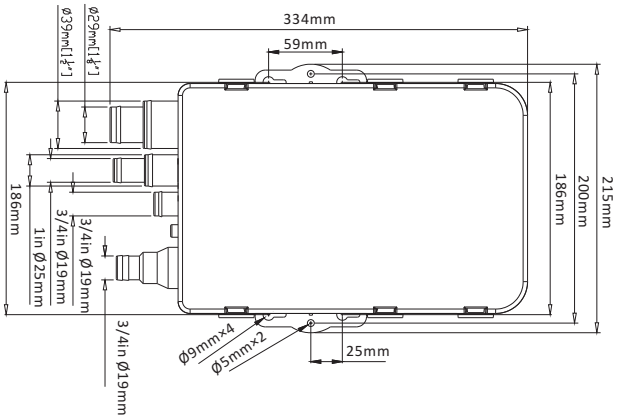

STANDARD PUMP CONFIGURATIONS

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia	N.W/G.W
SFBP1-G600-07	600 GPH	12V	2.5A	2.5 m	1 m	19 mm/3/4"	1.17/1.35 kg
SFBP2-G600-07	600 GPH	24V	1.5A	2.5 m	1 m	19 mm/3/4"	1.17/1.36 kg
SFBP1-G750-07	750 GPH	12V	3.0A	3.0 m	1 m	19 mm/3/4"	1.17/1.37 kg
SFBP2-G750-07	750 GPH	24V	1.6A	3.0 m	1 m	19 mm/3/4"	1.17/1.38 kg